


With 8 forcibly guided contacts!

Bistable relay for energy-efficient design

Special applications require relays that maintain their switch position during a supply voltage outage, thereby preventing loss of information about the current switch state. This relay is unique thanks to its high resistance to vibration and shock. The new OB 5623 bistable relay by DOLD fulfils these requirements. Furthermore, forcibly guided contacts allow for secure inquiry of the switch position.

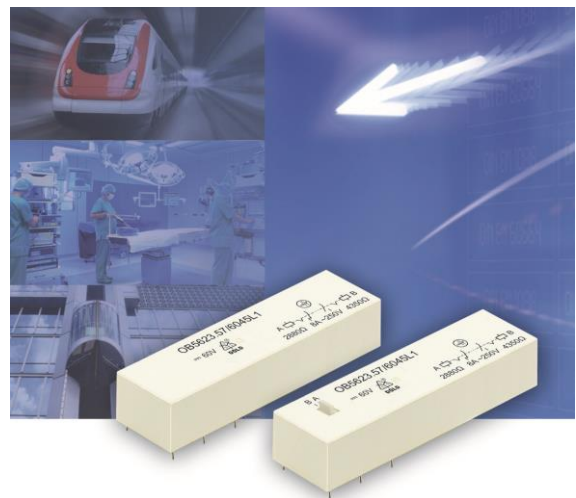

Reduced energy consumption in the relay's design was also a major focus. This is how this energy-saver only requires brief switching pulses of a few milliseconds to put their contacts into a defined switch position. Both magnetic systems make do with 1.2 W for the interlock device and 0.7 W for the release device. This also makes the relay ideal for applications with high packing densities in thermally-sensitive environments.

The 15.8 mm flat-design relay is optionally equipped with manual operation. This also

serves as a switch position indicator. Both variants are suitable for temperature ranges up to 80 °C and available with various contact materials. Also available in designs with double-contacts.

The forcibly guided contacts predestine the OB 5623 for use in demanding applications.

1269 characters (including spaces)

Contact Address for Publication
Please contact before publication
Nous contacter avant publication, s.v.p.

E.DOLD & Söhne KG
PO box 1251
78114 Furtwangen

Tel. +49 (0)7723/654-0, Fax -356
Email: dold-relays@dold.com
<http://www.dold.com>
Point of contact: Dipl. Ing. Sigmund Plachetka