


Safetyfunction in enclosure for consumer units

New ultra slim E-Stop-Module!

The e-stop module RK5942 of DOLD starts new demensions in designing again smaller safety modules. The width is reduced to 17.5 mm and the depth is only 70 mm. Many safety modules are already available in 22.5 mm at a depth of 120 mm. As the space in cabinets gets more and more important, Dold offers with this solution additional savings.

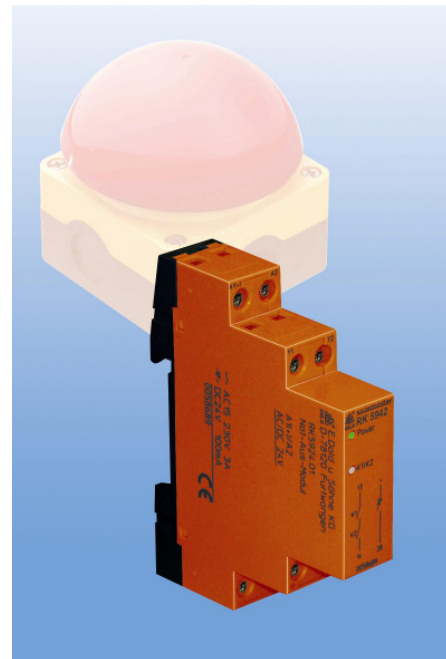

The safemaster protects man and machines. It is applied in safety circuits according to IEC/EN 60204 and fulfils the safety category 4 according to EN 954-1. The main applications are single channel e-stop circuits of machines and plants

The safety module offers one redundant safety NO-contact as well as one monitoring logic output. The safety contact is

suitable for thermal currents up to 5A. Two LEDs indicate operation and status of the outputs. For an external 2-channel disconnection the second internal safety contact can be connected separately to the terminals. In this case no monitoring output is available.

1035 Zeichen (inkl. Leerzeichen)

Kontaktadresse zur Veröffentlichung
Please contact before publication
Nous contacter avant publication, s.v.p.

E.DOLD & Söhne KG
Postfach 1251
78114 Furtwangen

Tel. +49 (0)7723/654-0, Fax -356
Email: dold-relays@dold.com
<http://www.dold.com>